

### Specifications

| Models  | GR-12        |             | GR-15        |             | GR-20        |             |
|---|--------------|-------------|--------------|-------------|--------------|-------------|
| Measurements                                    | US           | Metric      | US           | Metric      | US           | Metric      |
| Working height*                                 | 17 ft 4 in   | 5.28 m      | 20 ft 8 in   | 6.35 m      | 25 ft 9 in   | 7.85 m      |
| Platform height                                 | 11 ft 4 in   | 3.45 m      | 14 ft 8 in   | 4.52 m      | 19 ft 9 in   | 6.02 m      |
| <b>A A</b> Platform dimensions (length x width) |              |             |              |             |              |             |
| Standard  | 35 x 29.5 in | .89 x .75 m | 35 x 29.5 in | .89 x .75 m | 35 x 29.5 in | .89 x .75 m |
| Standard with extension                         | 55 x 29.5 in | 1.4 x .75 m | 55 x 29.5 in | 1.4 x .75 m | 55 x 29.5 in | 1.4 x .75 m |
| Standard AWP****                                | 27 x 26 in   | .69 x .66 m | 27 x 26 in   | .69 x .66 m | 27 x 26 in   | .69 x .66 m |
| Narrow AWP****                                  | 26 x 20 in   | .66 x .51 m | 26 x 20 in   | .66 x .51 m | 26 x 20 in   | .66 x .51 m |
| <b>C</b> Height - stowed                        | 5 ft 2 in    | 1.57 m      | 5 ft 2 in    | 1.57 m      | 6 ft 6 in    | 1.98 m      |
| <b>D</b> Length - stowed                        | 4 ft 5 in    | 1.35 m      | 4 ft 5 in    | 1.35 m      | 4 ft 5 in    | 1.35 m      |
| <b>E</b> Width                                  | 2 ft 5.5 in  | .75 m       | 2 ft 5.5 in  | .75 m       | 2 ft 7.5 in  | .80 m       |
| <b>F</b> Ground clearance - center              | 2.5 in       | .06 m       | 2.5 in       | .06 m       | 2.5 in       | .06 m       |

### Productivity

|                                |                     |                |                     |                |                     |                |
|--------------------------------|---------------------|----------------|---------------------|----------------|---------------------|----------------|
| Lift capacity                  | 500 lbs             | 227 kg         | 500 lbs             | 227 kg         | 350 lbs             | 159 kg         |
| Lift capacity - extension deck | 250 lbs             | 113 kg         | 250 lbs             | 113 kg         | 250 lbs             | 113 kg         |
| Drive speed - stowed           | 2.5 mph             | 4.0 km/h       | 2.5 mph             | 4.0 km/h       | 2.5 mph             | 4.0 km/h       |
| Drive speed - raised           | 0.5 mph             | 0.8 km/h       | 0.5 mph             | 0.8 km/h       | 0.5 mph             | 0.8 km/h       |
| Gradeability**                 | 30%                 |                | 30%                 |                | 30%                 |                |
| Turning radius - inside        | zero                |                | zero                |                | zero                |                |
| Turning radius - outside       | 4 ft 7 in           | 1.42 m         | 4 ft 7 in           | 1.42 m         | 4 ft 7 in           | 1.42 m         |
| Raise / lower speed            | 20 / 18 sec         | 20 / 18 sec    | 21 / 19 sec         | 21 / 19 sec    | 24 / 21 sec         | 24 / 21 sec    |
| Controls                       | 24V DC proportional |                | 24V DC proportional |                | 24V DC proportional |                |
| Tires - solid non-marking      | 10 x 3 x 8 in       | 25 x 8 x 20 cm | 10 x 3 x 8 in       | 25 x 8 x 20 cm | 10 x 3 x 8 in       | 25 x 8 x 20 cm |

### Power


|                           |                                |        |                                |        |                                |        |
|---------------------------|--------------------------------|--------|--------------------------------|--------|--------------------------------|--------|
| Power source              | 24V (four 6V 225 Ah batteries) |        | 24V (four 6V 225 Ah batteries) |        | 24V (four 6V 225 Ah batteries) |        |
| Hydraulic system capacity | 2.2 gal                        | 8.33 L | 2.2 gal                        | 8.33 L | 2.2 gal                        | 8.33 L |

### Weight\*\*\*

|  |           |        |           |        |           |          |
|--|-----------|--------|-----------|--------|-----------|----------|
|  | 1,581 lbs | 717 kg | 2,192 lbs | 994 kg | 2,451 lbs | 1,112 kg |
|--|-----------|--------|-----------|--------|-----------|----------|

### Standards Compliance

ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10

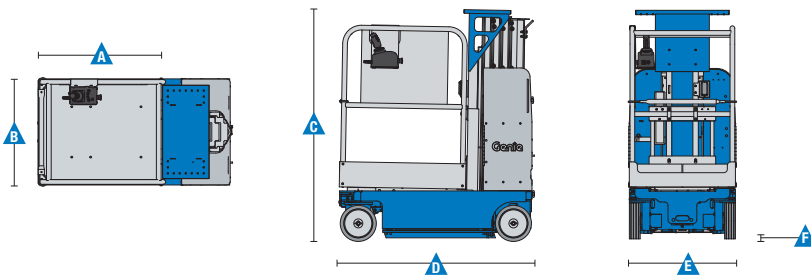

\* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

\*\* Gradeability applies to driving on slopes. See operator's manual for details regarding slope rating.

\*\*\* Weight will vary depending on options and/or country standards.

\*\*\*\* Not available for CE

### Features

#### Standard Features

##### Measurements

###### GR-12

- 17 ft 4 in (5.28 m) working height
- 11 ft 4 in (3.45 m) platform height
- Up to 500 lbs (227 kg) lift capacity

###### GR-15

- 20 ft 8 in (6.35 m) working height
- 14 ft 8 in (4.52 m) platform height
- Up to 500 lbs (227 kg) lift capacity

###### GR-20

- 25 ft 9 in (7.85 m) working height
- 19 ft 9 in (6.02 m) platform height
- Up to 350 lbs (159 kg) lift capacity

##### Productivity

- Work station tray (GR™-12, GR™-15 only)
- Standard platform with sliding midrail
- Auxiliary platform lowering
- Low 15.5 in (.39 m) platform entry height
- Patented rigid mast system
- Compact base 29.5 x 53 in (.75 m x 1.35 m) (GR™-12, GR™-15 only)
- Ground clearance 2.5 inches (stowed)
- SmartLink™ control system
- Battery charge indicator
- On-board diagnostic system
- AC power to platform
- Descent and tilt alarm
- Zero inside turning radius
- Dual wheel brakes
- Hydraulic brake release
- Pothole protection
- Hinged rear ABS covers for easy access to all major electrical and hydraulic components
- Tie down attachment points
- Overhead crane attachment point
- Large forklift pockets access
- Non-marking solid tires

##### Power

- Automatic 25 amp battery charger

#### Options & Accessories

##### Productivity

- 20 in (.51 m) extension platform with sliding midrail
- 20 in (.51 m) extension platform with gate
- Narrow AWP platform with gate\*
- Dual flashing beacons
- Motion alarm
- Fluorescent tube caddy
- Automotive horn
- EE Certification
- Biodegradable hydraulic oil
- Drive cutout while charging
- 10 ft retractable charging cord

##### Power

- 24V (four 6V 225 Ah batteries)
- 800 watt, 24 V inverter (120-230V AC/50-60 Hz)
- AGM maintenance-free batteries

##### Tire

- Non-marking solid tires

\*Not available for CE



#### Genie United States

18340 NE 76th Street  
P.O. Box 97030  
Redmond, Washington 98073-9730  
Telephone +1 (425) 881-1800  
Toll Free in USA/Canada +1 (800)-536-1800  
Fax +1 (425) 883-3475

#### Distributed By:



*The Lifting Professionals*

Bolingbrook, IL  
(630) 972-9199

South Holland, IL  
(219) 972-9199

[Click Here to Request a Quote](#)

Effective Date: January, 2014. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Genie is a registered trademark of Terex South Dakota, Inc. © 2014 Terex Corporation.