

Specifications

| Models | GR-26J | |
|------------------------------------|---------------|--------|
| Measurements | US | Metric |
| Working height* | 31 ft 9 in | 9.70 m |
| Platform height | 25 ft 9 in | 7.90 m |
| Horizontal reach maximum** | 8 ft 3 in | 2.51 m |
| Up-and-over clearance maximum | 21 ft 10.5 in | 6.70 m |
| A Platform length | 2 ft 5.5 in | 0.75 m |
| B Platform width | 2 ft 11 in | 0.90 m |
| Toeboard height | 6 in | 0.15 m |
| C Height - stowed | 6 ft 6 in | 1.99 m |
| D Length - stowed | 9 ft 1 in | 2.76 m |
| E Width | 3 ft 8.8 in | 1.14 m |
| F Wheelbase | 3 ft 11 in | 1.20 m |
| G Ground clearance - center | 3.4 in | 8.5 cm |

Productivity

| | | |
|-------------------------------|---------------------|---------------|
| Maximum platform occupancy*** | 2 | |
| Lift capacity | 500 lbs | 227 kg |
| Vertical jib rotation | 140° (+70°/-70°) | |
| Turntable rotation | 350° non-continuous | |
| Turntable tailswing | 1 in | 25 mm |
| Drive speed - stowed | 2.8 mph | 4.5 km/h |
| Drive speed - raised | 0.4 mph | 0.65 km/h |
| Gradeability**** | 25% | |
| Turning radius - inside | 31 in | 0.78 m |
| Turning radius - outside | 92 in | 2.30 m |
| Controls | 24V DC proportional | |
| Drive | dual rear wheel | |
| Disc brakes | dual rear wheel | |
| Tires (solid non-marking) | 16-5-11 ¼ | 40.5 cm diam. |



Power

| | | |
|---------------------------|-------------------------------------------------|------|
| Power source | 24 V DC (twelve 2 V batteries, 280 Ah capacity) | |
| Hydraulic system capacity | 4.84 gal | 22 L |

| | | |
|-------------|-----------|----------|
| Weight***** | 6,250 lbs | 2,835 kg |
|-------------|-----------|----------|

| | | |
|----------------------|----------------------------|--|
| Standards Compliance | CE, ANSI A92.5, CSA B354.4 | |
|----------------------|----------------------------|--|

Range Of Motion GR-26J

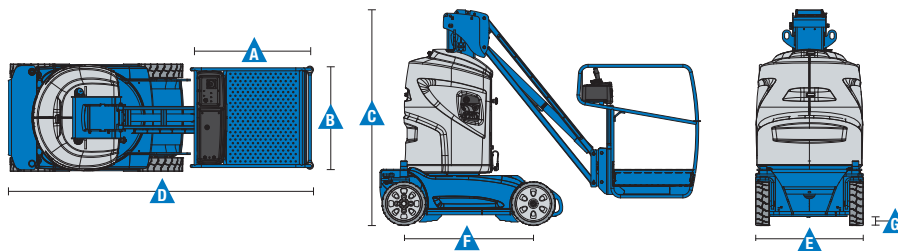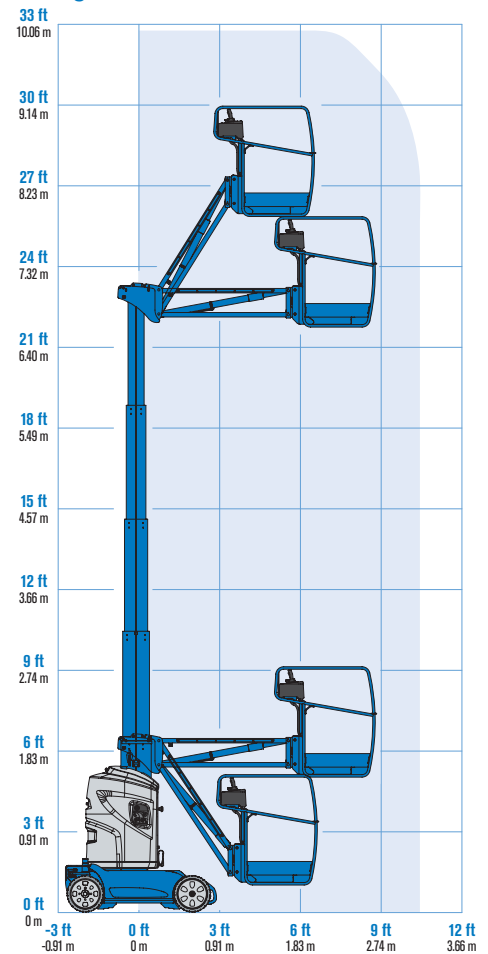

* The US equivalent of working height adds 6 ft to platform height.

** Non-working reach

*** ANSI/CSA maximum occupancy is 2 indoor and outdoor.

**** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.

***** Weight will vary depending on options and/or country standards.

Features

Standard Features

Measurements

GR-26J

- 31 ft 9 in (9.70 m) working height
- 8 ft 3 in (2.51 m) horizontal reach
- 21 ft 10.5 in up-and-over reach
- Up to 500 lbs (227 kg) lift capacity
- 4 ft 10 in (1.45 m) jib boom with 140° working range

Productivity

- Standard steel platform 0.90 m x 0.75 m (2 ft 11 in x 2 ft 5.5 in) with sliding midrail
- Hydraulic turntable rotation
- Fully proportional lift and drive system
- Drivable at full height
- Low 6 in (15 cm) platform entry height
- Maintenance free rigid steel hydraulic mast
- 44.8 in (1.14 m) compact width
- Low unit height of 6 ft 6 in (1.99 m)
- Low machine weight of 6,250 lbs (2,835 kg)
- Onboard diagnostic system
- AC power to platform
- Direct electric rear wheel drive with electric parking brake
- Front wheel steering
- Brake release switch
- Reinforced ABS chassis covers
- Tie down attachments points
- Overhead crane attachment points
- Non-marking solid tires
- Drive enable system
- Horn
- Hour meter
- Tilt level sensor with audible alarm
- Platform overload sensing
- Manual platform lowering valve
- Emergency stop at both platform and ground controls

Power

- Automatic 30 Amp 24 V battery onboard charger
- 24 V DC (twelve 2V, 280 Ah traction batteries)
- Battery charge indicator

Options & Accessories

Productivity

- Flashing beacon
- Biodegradable hydraulic oil
- Platform work lights



Genie United States

18340 NE 76th Street
P.O. Box 97030
Redmond, Washington 98073-9730
Telephone +1 (425) 881-1800
Toll Free in USA/Canada +1 (800)-536-1800
Fax +1 (425) 883-3475

Distributed By:



The Lifting Professionals

Bolingbrook, IL
(630) 972-9199

South Holland, IL
(219) 972-9199

[Click Here to Request a Quote](#)

Effective Date: January, 2014. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Genie is a registered trademark of Terex South Dakota, Inc. © 2014 Terex Corporation.