



HA61 JRT


Optimal productivity

- Continuous 360° turntable rotation
- Fully proportional controls and simultaneous boom functions
- Narrow turning radius (12 ft 10 in)
- Zero tailswing

Outstanding rough terrain driving features

- 4 wheel drive and 4 wheel steer mean greater maneuverability
- Industry leading 46 ft 4 in outreach
- Hydraulic differential lock
- 17 in ground clearance

Reliable and easy to maintain

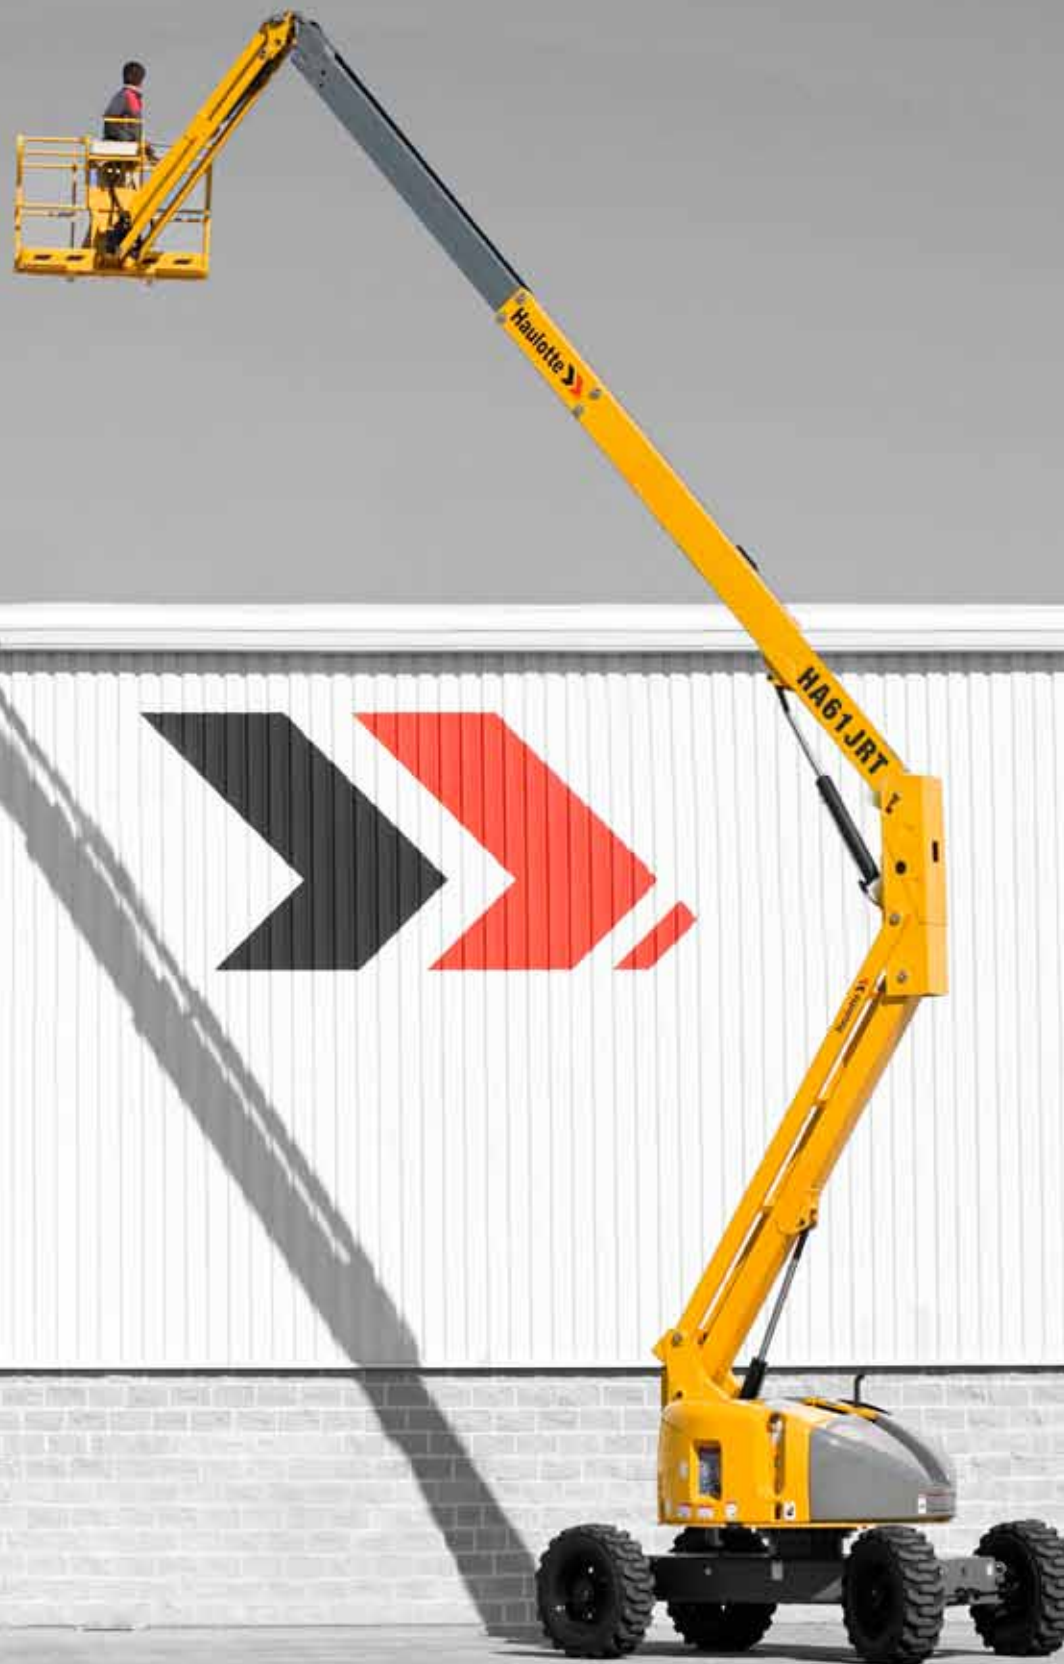




TECHNICAL DATA

HA61 JRT

Working height	67 ft 2 in
Platform height	61 ft 2 in
Horizontal outreach	46 ft 4 in
Up and over height	22 ft 4 in
Lift capacity	500 lbs
F x G Platform size	8 ft x 2 ft 7 in
A Length	29 ft 4 in
B Width	7 ft 10 in
C Height - stowed	8 ft 9 in
H Transport length	22 ft 4 in
Transport height	10 ft 2 in
Vertical jib rotation	140° (+70/-70)
Platform rotation	180° (+90/-90)
Turntable rotation	360°
Tailswing	0 ft
D Wheelbase	9 ft 2 in
E Ground clearance	17 in
Drive speed	0.3 - 2.8 mph
Gradeability	40 %
Turning radius - outside	12 ft 10 in
Tires	385/65-22.5
Engine	33.2 kW - 45.1 hp
Weight	25,816 lbs

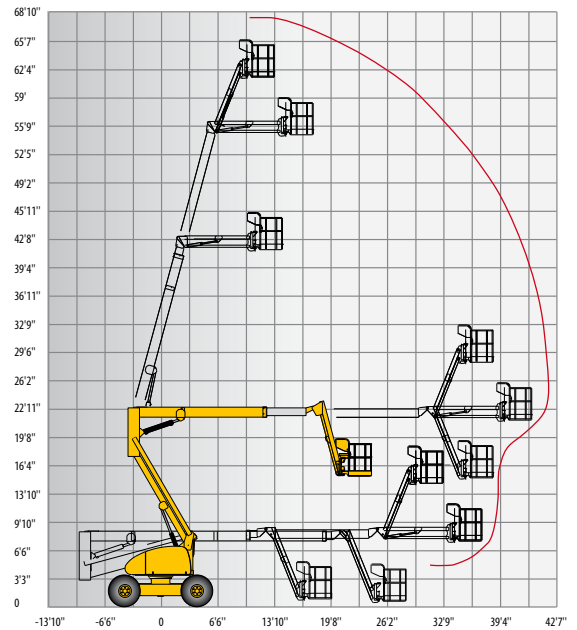

STANDARD EQUIPMENT

- 4 wheel drive, 4 wheel steer
- Foam-filled rough terrain tires
- Hour meter
- Swing lockpin for transport
- Tow hooks
- 8 ft platform
- AC power to the platform
- Electric horn
- Fully proportional controls
- Tilt alarm

OPTIONS AND ACCESSORIES

- Arctic package (consult factory)
- Alarm package (motion alarm)
- Flashing beacon
- Air line to platform
- 55 W Platform worklight
- Travel alarm
- Descent alarm

