



Gerenuk[®] 500 Multilifter

Made in Denmark
Pat. pend.

Gerenuk[®] 500 is a hydraulic, remote-controlled multilifter that can be adapted to all telescopic loaders, cranes and other lifting gear to lift practically every known building material.



Unique
3D
manipulation

Mount from any angle.

Unique handling

3D manipulation



Unique
3D
manipulation

The strong, and extremely precise head, on which the front system is mounted, has a sturdy design which means that the front system can rotate and tilt the elements in all directions. Consequently, the mounting options are almost unlimited.

Millimeter precise



Power is a factor, if you can control it. With the Gerenuk[®] 500 you can fit elements millimeter precise with the sensitive remote control. The whole HHI concept of Power & Precision applies to its full extend in the Gerenuk[®] 500 handling abilities.

Unique safety

400% overcapacity



A two-circuit vacuum system ensures that the suction discs always have 400% overcapacity. A visual - and an acoustic alarm ensure that the machine is not operated until the system has reached optimum suction power. This makes the vacuum system one of the safest systems in the world.

Unique
3D
manipulation

The primary unique feature of the Gerenuk[®] 500 is the ability to manipulate materials 360° in all directions. You can approach the mounting area from any angle, and adapt the load with the 3D feature. That is second to none.

Unique service

Remote service



The Gerenuk[®] 500 can go online and be remotely serviced. This enables speedy diagnostics, remote programming and tailored repairs. The onboard computer supervises all systems and reports any damage.

All round adaptability



You can adapt the Gerenuk[®] 500 to lifting any kind of building material, and you can mount the machine on any lifting host machine in your garage. Mount materials from 0 to 110 meters millimeter precise.

StevensonCrane.com
630-972-9199 or 219-972-9199







Gerenuk[®] 500 Multilifter

Made in Denmark
 Pat. pend.


Technical data

Description	Value
Loading capacity	1,100 lbs.
Own weight	1,500 lbs.
Adaptor weight	Type specific
Machine min. width	43"
Machine min. depth	36"
Machine min. height	69"
Autonomy	8 hours
Side shift	8"
Telescopic arm	17"
Charging current	220 or 110 V
Battery specs.	2 x 152 Ah / 24 V
Charging time	10-100 % - 8 hours
Charging time	25-70 % - 1 hour

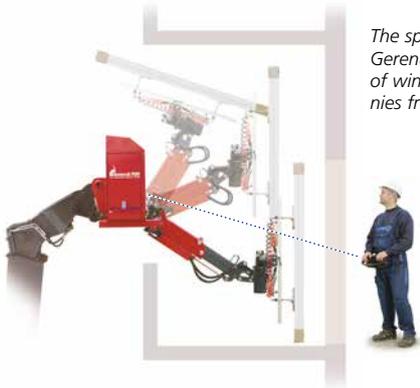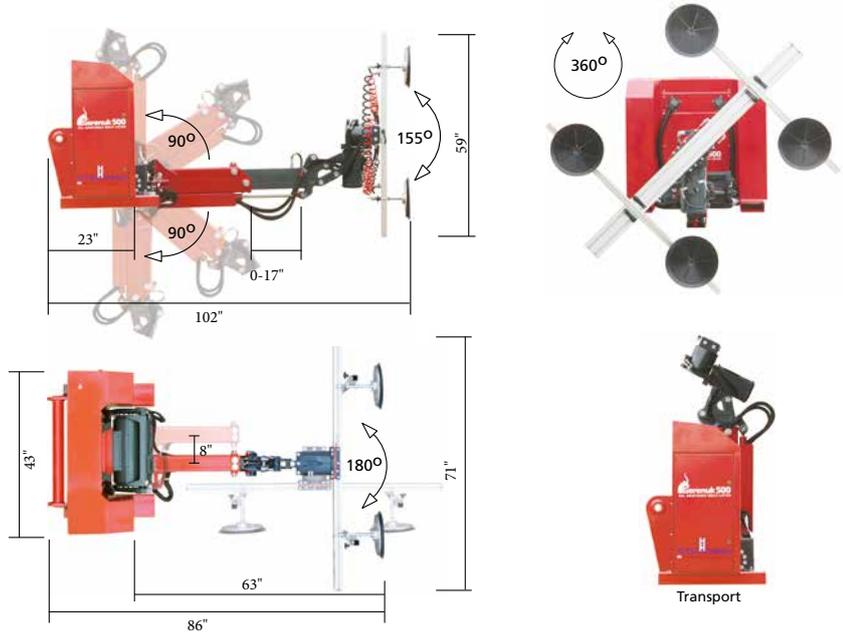

The special construction of the Gerenuk[®] 500 allow e.g. fitting of windows and doors on balconies from the outside.

Gerenuk[®] 500 complies with the requirements of Machinery Directive 2006/42/EC.

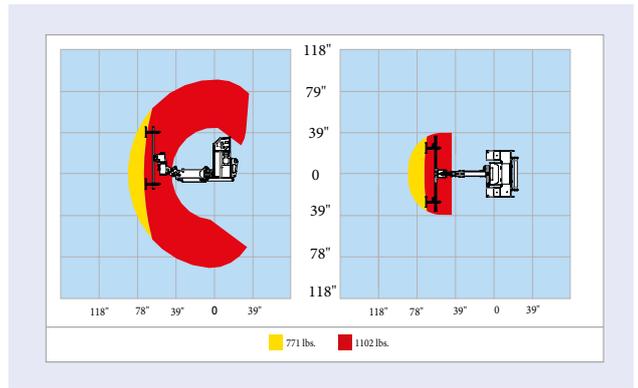

Unique adaptability

Materials



Host machines

Mount the Gerenuk[®] 500 on any hostmachine already in your possession. Mount building materials from 0 to 100 meters.



Sales:



StevensonCrane.com
 630-972-9199
 or 219-972-9199

